




# G2 Fittings

## The Next Fitting Generation

The next generation of fittings offers greater flexibility and efficiency, now compatible with four press profiles for improved tool and cost management. Designed for reliability, each fitting is tested to DVGW certification standard, ensuring unpressed connections are immediately detectable. A 360° viewing window allows clear visibility of the stop ring, ensuring accurate pipe insertion depth at a glance.

Features an optimised flow design delivering up to 20% better flow rate. Enhanced sleeve inscriptions make it easy to identify dimensions and press profiles. The advanced profile geometry ensures permanent tightness, offering a long-lasting connection that meets the highest standards.


Maintaining safety and ease of use, the new fittings retain the trusted double press jaw stop and slim design, ensuring a seamless and secure installation. With these innovations, professionals can have confidence in this higher quality product.

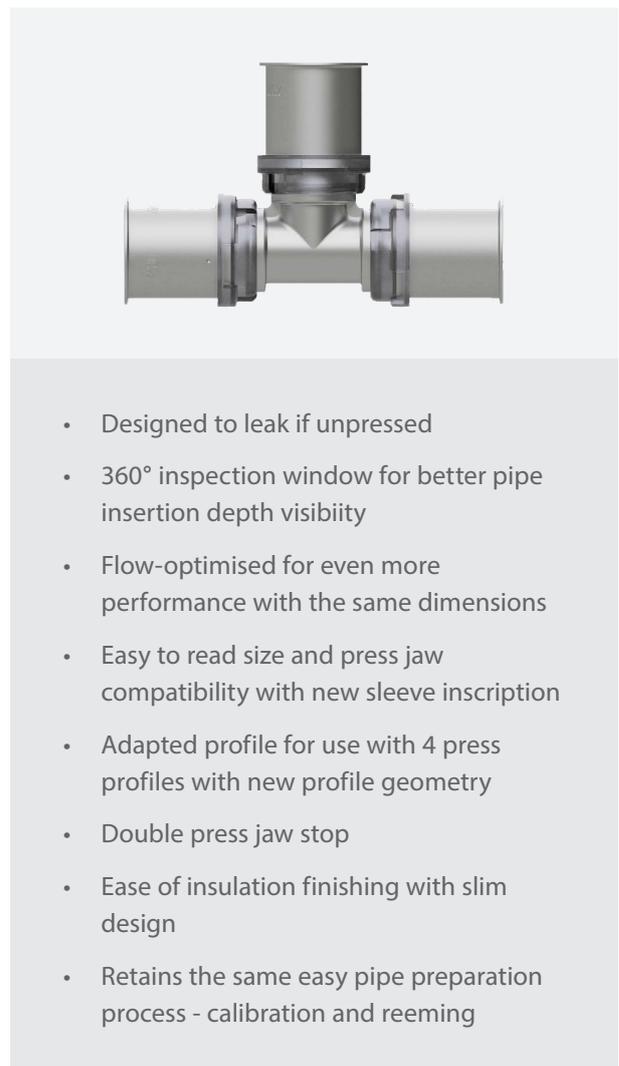

- Designed to leak if unpressed
- 360° inspection window for better pipe insertion depth visibility
- Flow-optimised for even more performance with the same dimensions
- Easy to read size and press jaw compatibility with new sleeve inscription
- Adapted profile for use with 4 press profiles with new profile geometry
- Double press jaw stop
- Ease of insulation finishing with slim design
- Retains the same easy pipe preparation process - calibration and reaming

## G2 Fitting Changes

- 1. Improved Flow Rate:** Optimised zeta values provide better efficiency and overall system performance.
- 2. New Stop Ring Design:** The stop ring is now made from transparent, light grey plastic, providing a 360° view of the inserted pipe for easier inspection and verification during installation.
- 3. Enhanced Stainless Steel Sleeve:** The sleeve has been slightly modified to allow crimping with four contours (U, TH, H, and RFz), ensuring greater versatility, while new labeling featuring the Multitubo logo, dimension, press contour, and a traceability code improves identification and quality assurance.
- 4. Designed Leaking if Unpressed:** Designed to visibly leak if not pressed, this feature enhances safety and ensures secure installations.
- 5. Full Compatibility Maintained:** The G2 fitting seamlessly integrates with existing Multitubo systems and remains compatible with other solutions.

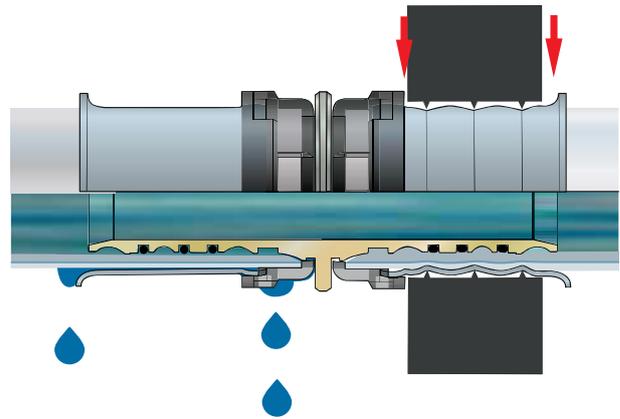


— Non-pressed connections are intentionally designed to leak if not properly pressed.



— Enhanced stainless steel sleeve and slim profile for easy installation.




— New G2 Fitting has transparent grey plastic stop rings to easily differentiate from the original fittings

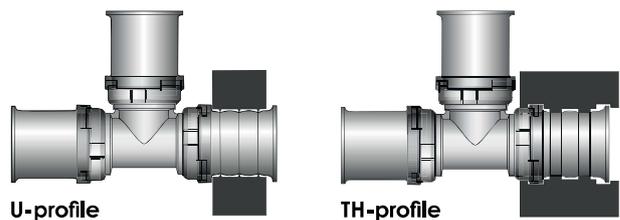

U-profile

TH-profile

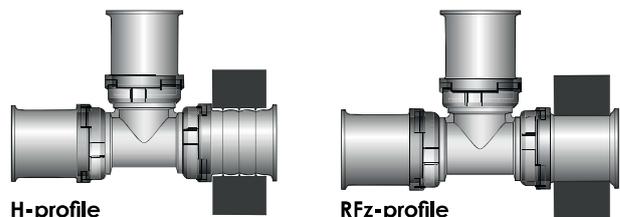

H-profile

RFz-profile

— Enhanced four contours for greater versatility for crimping.