Korado Vertical Radiator Installation

Radiator set out for all vertical radiators

The following information is applicable to:

Models: Type 22
Heights: 1,600 and 1,800
Lengths: 400 and 600

	22
Panel depth – excluding back supports	102
Panel depth from the wall to the front panel (F7VERT brackets provided as standard)	129
Distance from wall to centre of the pipe connection (F7VERT brackets provided)	77

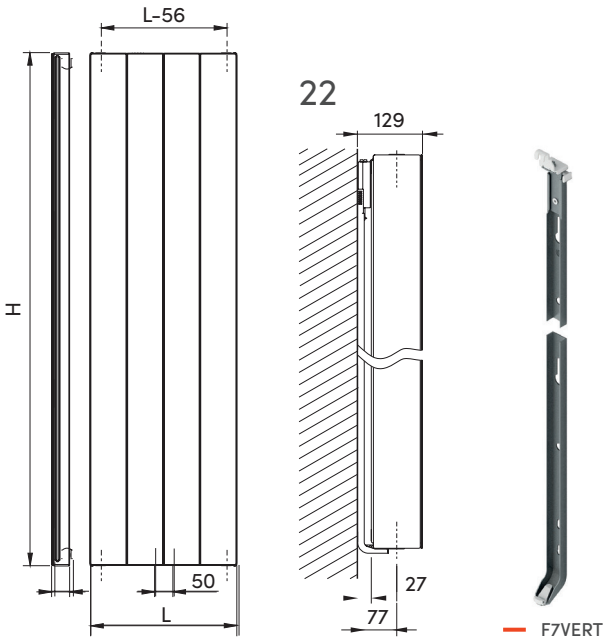

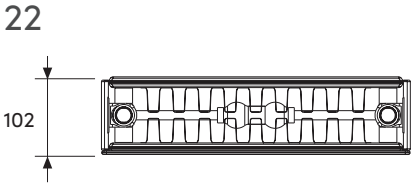

KORADO®

Connection Possibilities

Middle Bottom Connection



Side Bottom Connection



Middle Top Connection



Side Top Connection



Valve Connection

Discreetly conceal pipe work with this valve block kit (DLVBDANTRVA or DLVBDANTRVS). 50mm pipe centres. Isolation ports. Available in Straight and Angled models.

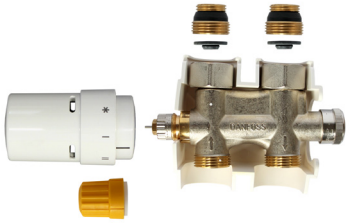

TRV Valve Block Kit Straight (DLVBDANTRVS)



TRV Block Kit Angled (DLVBDANTRVA)

KORADO®