

## QUICK COUPLER KIT

This accessory permits a quick connection and removal of your tanks to the installation and a really handy drainage during maintenance or replacement activities. A bolt connection fastens together a double check valve system that allows the water to enter and exit from the tank and once decoupled the valves close-off preventing any waste of water during replacement or maintenance activities on the tank that can also be emptied by means of a dedicated drainage valve.



Complete kit




Detached kit



Water flows




Water stops

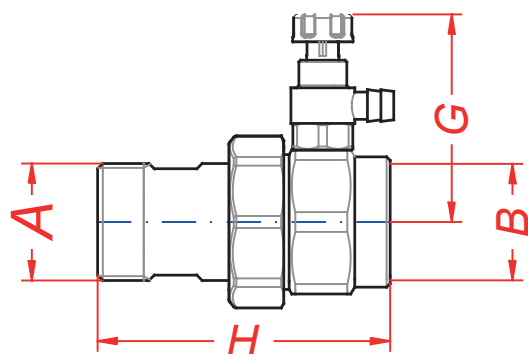

A	B	H	G
3/4"	3/4"	82.5	58.5

Dimensions chart

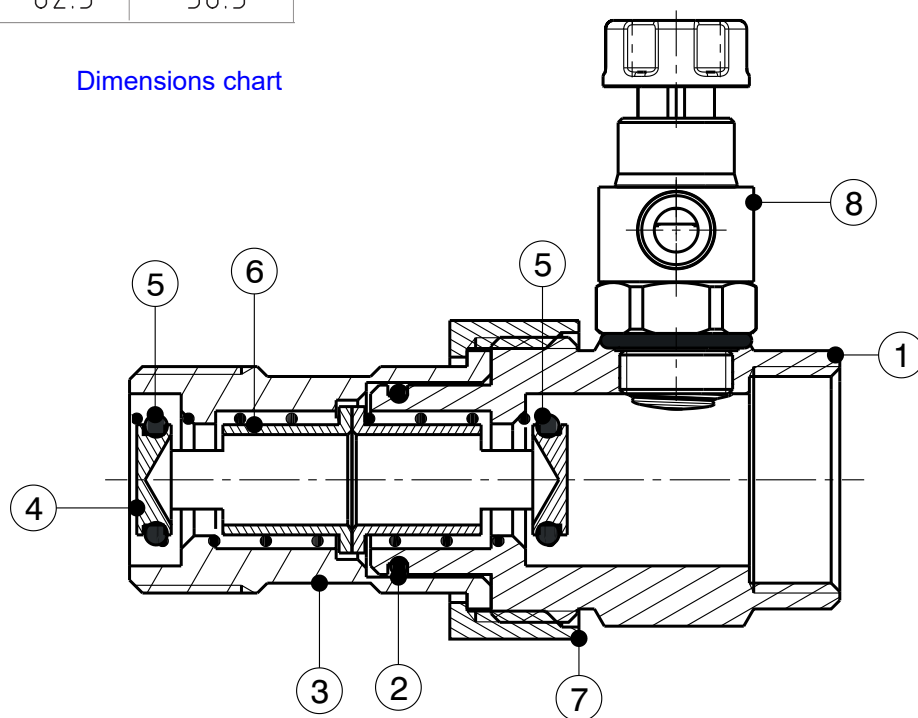

N	PART	MATERIAL
1	BRASS CHECK VALVE BODY	UNI-EN 12164:2011 CW614N
2	O-RING 18x2	EPDM 70SH
3	BRASS CONNECTOR TO SYSTEM G3/4"	UNI-EN 12164:2011 CW614N
4	SPRING HOLDER (CHECK VALVE)	UNI-EN 12164:2011 CW614N
5	O-RING 9.90x2.62	EPDM 70SH
6	SPRING (CHECK VALVE)	AISI 302
7	BRASS COUPLING BOLT 1" CH37 H15	UNI-EN 12165:2016 CW617N
8	ADJUSTABLE DRAINAGE/PURGE VALVE G1/4"	