



Ø 22 – P 82

White version


Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Power Δt 50 °C 75/65-20		Power Δt 40 °C	Power Δt 30 °C	Power Δt 20 °C	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance W* Classe 1 *	Electric resistance W* Classe 2 *
					W	Kcal/h								
1280	585	535	30	14	489	421	372	261	158	1,235	8	4,3	300	300
1280	735	685	30	14	629	541	478	334	202	1,24	8,9	5	400	400
1690	585	535	30	18	678	583	517	365	223	1,213	9	5,6	500	500
1690	735	685	30	18	787	678	598	419	254	1,233	10,3	6,5	600	600

*max electric heating element power suitable for this size

Chrome version

Height H (mm)	Length L (mm)	Tappings centre l (mm)	Width	Num. of tubes	Power Δt 50 °C 75/65-20		Power Δt 40 °C	Power Δt 30 °C	Power Δt 20 °C	Exp. n	Empty weight (kg)	Water content (l)	Electric resistance W* Classe 1 *	Electric resistance W* Classe 2 *
					W	Kcal/h								
1280	585	535	30	14	330	284	251	176	107	1,235	8	4,3	200	200
1280	735	685	30	14	424	365	322	226	136	1,24	8,9	5	300	300
1690	585	535	30	18	457	393	349	246	151	1,213	9	5,6	400	400
1690	735	685	30	18	531	457	403	283	171	1,233	10,3	6,5	500	500

*max electric heating element power suitable for this size

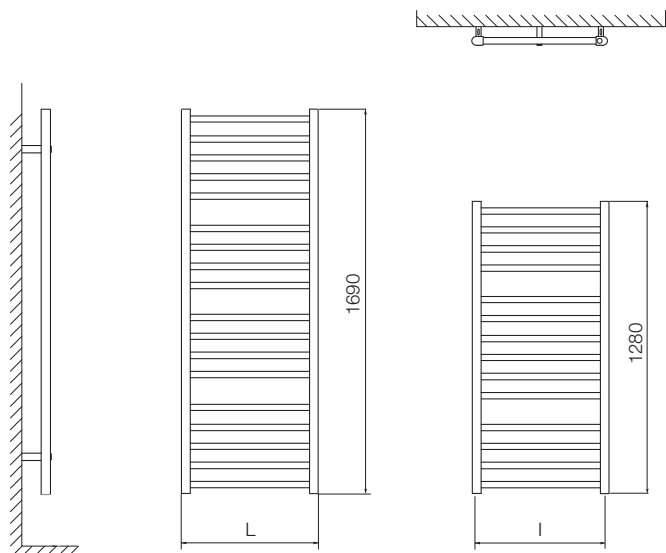

Technical characteristics

- Pipes diameter 22mm
- Round collectors 35mm
- Pipes distance 82mm
- Max working pressure = 10 bar
- Test pressure = 13 bar
- Max working temperature = 110°C

Included in the packing

- 3 x 1/2" connections, internal thread (two bottom connections, one top connection)
- 1/2" air vent, included in the package
- 4 brackets included in the package

Special Versions

- Unique electric: not available
- Electrification kit (for mixed use) available on request: kit with ON/OFF switch (class 1) and Schuko plug; kit with analogue (class 2) or digital (class 2) room thermostat and remote control unit (a kit with heating element only is also available) - the maximum outputs of the kit for each size are given in the table on the facing page
- Chromed product: Unique chrome
- Coloured version: not available
- One-pipe system (see Technical Info pages): yes
- Central connection: not available
- Side connections: not available
- Room divider fixing kit: not available
- Valve and lockshield-valve are to be ordered separately



Connection accessories



Ovus Chrome Valve and Lockshield valve
1/2"x24/19



Ovus White Valve and Lockshield valve
1/2"x24/19



Thermostatic Heads for Ovus Kit
(M30x1,5)



Thermostatic Heads for Ovus Kit
(M30x1,5)